


Universal motors 4 or 6 pole

PSC or 3PH multi fixing


Serie P (102) & G (120)

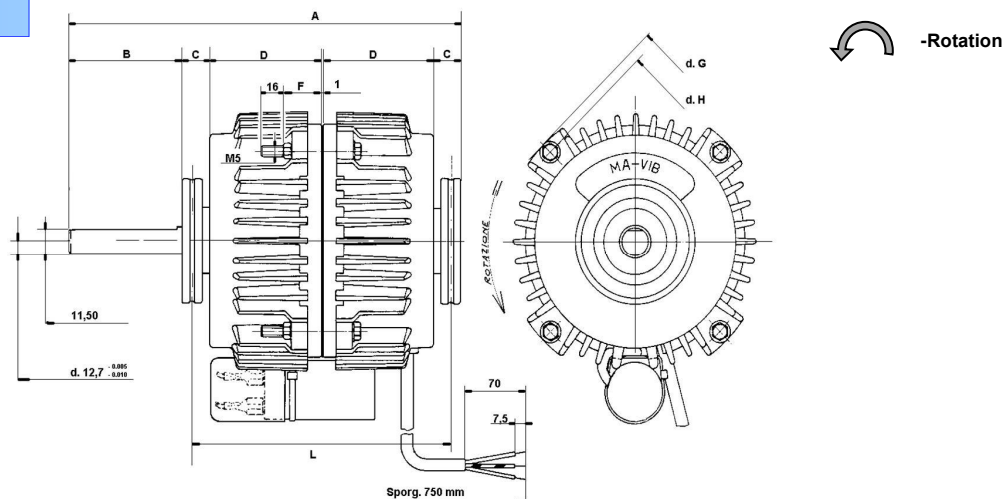

Serie P (102) & G (120) : marcati **CE**, cl. B, conformi IEC/EN.60335-1

CODE	Electric data							Dimensions								Impeller	
	V. / Hz.	A	W _{in}	W _{out}	RPM	Prot.	μF	A	B	C	D	F	G	H	L	max ø	Incl, °
P43Y0 ...	230 / 50-60	0,85	165	85	1350	Therm.	3,15	197	57	13,5	56	18,5	133	122	130,5	350	33
P45Y0 ...	230 / 50-60	1,2	280	150	1350	Therm.	5	197	57	13,5	56	18,5	133	122	130,5	400	27
G46Y0 ...	230 / 50-60	2,20	340	170	1450	Therm.	8	239	77	20,5	60	24	153	142	149,5	450	27
G46Y0 ...	230 / 50-60	2,15	440	260	1400	Therm.	12,5	270	108	20,5	60	24	153	142	149,5	500	27
P63Y0 ...	230 / 50-60	0,45	110	50	950	Therm.	3,15	197	57	13,5	56	18,5	133	122	130,5	350	33
P65Y0 ...	230 / 50-60	0,75	165	80	950	Therm.	5	197	57	13,5	56	18,5	133	122	130,5	400	33
G66Y0 ...	230 / 50-60	1,45	215	100	950	Therm.	4	239	77	20,5	60	24	153	142	149,5	450	33
G66Y0 ...	230 / 50-60	1,55	285	135	925	Therm.	6,3	270	108	20,5	60	24	153	142	149,5	500	33
P43J0 ...	3PH 400/50	0,38	200	90	1300	Therm.		197	57	13,5	56	18,5	133	122	130,5	350	33
P45J0 ...	3PH 400/50	0,56	275	170	1400	Therm.		223	83	13,5	56	18,5	133	122	130,5	400	27
G66J0 ...	3PH 400/50	1,25	570	-	1375	Therm.		239	77	20,5	60	24	153	142	149,5	450	27
G66J0 ...	3PH 400/50	1,25	570	-	1375	Therm.		270	108	20,5	60	24	153	142	149,5	500	27

CONNECTION DIAGRAM - 3ph



CONNECTION DIAGRAM - 1ph

